

ALB651

32.0" x 23.63" x 23.5" (H x W x D)

Built-in undercounter ADA compliant refrigerator-freezer for general purpose use, w/dual evaporator cooling, SS frame for slide-in panels, and white cabinet

Highlights:

32 inch ADA compliant height fits under counters

Flexible design allows built-in or freestanding use in 24" spaces

Zero degree freezer compartment


Improved temperature performance with our unique dual evaporator cooling



ADA compliant	32 inch height fits under standard ADA counters	
Built-in capable	Make the best use of space by installing your refrigerator under the counter and flush with other cabinets	
Fully finished white cabinet	Allows the refrigerator-freezer to be used as a freestanding model	
Stainless steel door frame	Two-piece U-shaped door frame in stainless steel accepts slide-in panels (sized 23" W x 28" H), allowing users to create a custom look to match or complement adjacent cabinetry	
Cycle defrost	This system utilizes user-friendly automatic defrost operation in the fresh food section and efficient manual defrost operation in the freezer compartment	
Dual evaporator	Our unique and efficient design separately cools the refrigerator while maintaining zero degrees in the freezer with two evaporators	
Zero degree freezer	Static manual defrost freezer section offers more stability	
Adjustable thermostat	Dial thermostat located inside for easy temperature management	
Interior light	Automatically illuminates when you open the door	
Adjustable shelves	Rearrange your refrigerator space to accommodate all shapes and sizes or remove shelves for a simple clean-up	

ALB651 Specifications:

Trengin 52.0 Width 23.63" Depth 23.5" Capacity 5.1 cu.ft. Ext Depth with Handle 25.13" Interior Height 1 19.5" Interior Height 1 20.5" Interior Depth 1 17.0" Interior Depth 1 17.0" Interior Depth 2 5.0" Interior Depth 2 11.5" Comp Step Height 7.0" Comp Step Depth 5.0" Shipping Weight 107.0 lbs. Weight 100.0 lbs. Amps 1.3 Voltage/Frequency 115 V AC/60 Hz Canadian Electrical Safety ULC Energy Usage/Year 434.0 kWh/year US Electrical Safety UL Reversible Yes Door Swing RHD Crisper Quantity 1 Shelf Type Glass Crisper Finish Transparent Full Door Shelf Quantity 3 Defrost Type Giass Crisper F	Hoight	32.0"
Depth23.5"Capacity5.1 cu.ft.Ext Depth with Handle25.13"Interior Height 119.5"Interior Width 120.5"Interior Depth 117.0"Interior Depth 17.0"Interior Height 25.0"Interior Width 219.0"Interior Depth 211.5"Comp Step Height7.0"Comp Step Depth5.0"Shipping Weight107.0 lbs.Weight100.0 lbs.Amps1.3Voltage/Frequency115 V AC/60 HzCanadian Electrical SafetyULCEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90"45.63"Height to Hinge Cap32.25"Fan TypeDialLighttrueHigh Side PSI285.0Freon Oz2.6	Height	
Capacity 5.1 cu.ft. Ext Depth with Handle 25.13" Interior Height 1 19.5" Interior Width 1 20.5" Interior Depth 1 17.0" Interior Depth 1 7.0" Interior Depth 2 5.0" Interior Depth 2 11.5" Comp Step Height 7.0" Comp Step Depth 5.0" Shipping Weight 107.0 lbs. Weight 100.0 lbs. Amps 1.3 Voltage/Frequency 115 V AC/60 Hz Canadian Electrical Safety ULC Energy Usage/Year 434.0 kWh/year US Electrical Safety UL Reversible Yes Door Swing RHD Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Glass Crisper Finish Transparent Full Door Shelf Quantity 3 Defrost Type Cycle Depth with door at 90" 45.63"		
Ext Depth with Handle 25.13" Interior Height 1 19.5" Interior Height 1 20.5" Interior Depth 1 17.0" Interior Depth 1 17.0" Interior Depth 1 17.0" Interior Depth 2 5.0" Interior Depth 2 11.5" Comp Step Height 7.0" Comp Step Depth 5.0" Shipping Weight 107.0 lbs. Weight 100.0 lbs. Amps 1.3 Voltage/Frequency 115 V AC/60 Hz Energy Usage/Year 434.0 kWh/year US Electrical Safety ULC Energy Usage/Year 434.0 kWh/year US Electrical Safety UL Reversible Yes Door Swing RHD Crisper Quantity 1 Shelf Type Glass Crisper Cover Type Glass Crisper Finish Transparent Full Door Shelf Quantity 3 Defrost Type Sc/s Height to Hinge Cap 32.25" <td>•</td> <td></td>	•	
Interior Height 119.5"Interior Width 120.5"Interior Depth 117.0"Interior Depth 15.0"Interior Height 25.0"Interior Depth 211.5"Comp Step Height7.0"Comp Step Height5.0"Shipping Weight107.0 lbs.Weight100.0 lbs.Amps1.3Voltage/Frequency115 V AC/60 HzEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULCEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf TypeGlassCrisper Cover TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeSc/s8"Height to Hinge Cap32.25"Fan TypeExteriorHeight to Hinge Cap285.0High Side PSI285.0Freen Oz2.6		
Interior Width 1 20.5" Interior Depth 1 17.0" Interior Depth 1 17.0" Interior Height 2 5.0" Interior Width 2 19.0" Interior Depth 2 11.5" Comp Step Height 7.0" Comp Step Depth 5.0" Shipping Weight 107.0 lbs. Weight 100.0 lbs. Amps 1.3 Voltage/Frequency 115 V AC/60 Hz Canadian Electrical Safety ULC Energy Usage/Year 434.0 kWh/year US Electrical Safety UL Reversible Yes Door Swing RHD Crisper Quantity 1 Shelf Quantity 2 Adjustable Shelf true Shelf Type Glass Crisper Finish Transparent Full Door Shelf Quantity 3 Defrost Type Sc/sa" Height to Hinge Cap 32.25" Fan Type Exterior Thermostat Type Dial	•	
Interior Depth 117.0"Interior Height 25.0"Interior Width 219.0"Interior Depth 211.5"Comp Step Height7.0"Comp Step Height20.5"Comp Step Depth5.0"Shipping Weight107.0 lbs.Weight100.0 lbs.Amps1.3Voltage/Frequency115 V AC/60 HzEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULCEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf TypeGlassCrisper Cover TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeDialLighttrueHigh Side PSI285.0Freon Oz2.6		
Interior Height 25.0"Interior Width 219.0"Interior Depth 211.5"Comp Step Height7.0"Comp Step Width20.5"Comp Step Depth5.0"Shipping Weight107.0 lbs.Weight100.0 lbs.Amps1.3Voltage/Frequency115 V AC/60 HzCanadian Electrical SafetyULCEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeScla"Height to Hinge Cap32.25"Fan TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6		
Interior Width 219.0"Interior Depth 211.5"Comp Step Height7.0"Comp Step Width20.5"Comp Step Depth5.0"Shipping Weight107.0 lbs.Weight100.0 lbs.Amps1.3Voltage/Frequency115 V AC/60 HzEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULCEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6		
Interior Depth 211.5"Comp Step Height7.0"Comp Step Width20.5"Comp Step Depth5.0"Shipping Weight107.0 lbs.Weight100.0 lbs.Amps1.3Voltage/Frequency115 V AC/60 HzEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULCEnergy Usage/YearYesDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6	•	
Comp Step Height7.0"Comp Step Width20.5"Comp Step Depth5.0"Shipping Weight107.0 lbs.Weight100.0 lbs.Amps1.3Voltage/Frequency115 V AC/60 HzCanadian Electrical SafetyULCEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6		
Comp Step Width20.5"Comp Step Depth5.0"Shipping Weight107.0 lbs.Weight100.0 lbs.Amps1.3Voltage/Frequency115 V AC/60 HzCanadian Electrical SafetyULCEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeDialLighttrueHigh Side PSI285.0Freon Oz2.6		
Comp Step Depth5.0"Shipping Weight107.0 lbs.Weight100.0 lbs.Amps1.3Voltage/Frequency115 V AC/60 HzCanadian Electrical SafetyULCEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6		
Shipping Weight107.0 lbs.Weight100.0 lbs.Amps1.3Voltage/Frequency115 V AC/60 HzCanadian Electrical SafetyULCEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeDialLighttrueHigh Side PSI285.0Freon Oz2.6		
Weight100.0 lbs.Amps1.3Voltage/Frequency115 V AC/60 HzCanadian Electrical SafetyULCEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6		
Amps1.3Voltage/Frequency115 V AC/60 HzCanadian Electrical SafetyULCEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6		
Voltage/Frequency115 V AC/60 HzCanadian Electrical SafetyULCEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freon Oz2.6	•	
Canadian Electrical SafetyULCEnergy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper Cover TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6	•	
Energy Usage/Year434.0 kWh/yearUS Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper Cover TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6		
US Electrical SafetyULReversibleYesDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper Cover TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°32.25°Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freon Oz2.6	•	
ReversibleYesDoor SwingRHDDoor SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper Cover TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63°Height to Hinge Cap32.25°Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6		•
Door SwingRHDCrisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper Cover TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freon Oz2.6		
Crisper Quantity1Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper Cover TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63°Height to Hinge Cap32.25°Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6		
Shelf Quantity2Adjustable ShelftrueShelf TypeGlassCrisper Cover TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63°Height to Hinge Cap32.25°Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6	•	
Adjustable ShelftrueShelf TypeGlassCrisper Cover TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6	Crisper Quantity	1
Shelf TypeGlassCrisper Cover TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6	Shelf Quantity	2
Crisper Cover TypeGlassCrisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6	Adjustable Shelf	true
Crisper FinishTransparentFull Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6	Shelf Type	Glass
Full Door Shelf Quantity3Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freen Oz2.6	Crisper Cover Type	Glass
Defrost TypeCycleDepth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freon Oz2.6	Crisper Finish	Transparent
Depth with door at 90°45.63"Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freon Oz2.6	Full Door Shelf Quantity	3
Height to Hinge Cap32.25"Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freon Oz2.6	Defrost Type	Cycle
Fan TypeExteriorThermostat TypeDialLighttrueHigh Side PSI285.0Freon Oz2.6	Depth with door at 90°	45.63"
Thermostat Type Dial Light true High Side PSI 285.0 Freon Oz 2.6	Height to Hinge Cap	32.25"
LighttrueHigh Side PSI285.0Freon Oz2.6	Fan Type	Exterior
High Side PSI285.0Freon Oz2.6	Thermostat Type	Dial
Freon Oz 2.6	Light	true
	High Side PSI	285.0
Level Legs Quantity 4	Freon Oz	2.6
	Level Legs Quantity	4
Refrigerant Type R134a	Refrigerant Type	R134a
Low Side PSI 70.0	Low Side PSI	70.0
Compressor Warranty 5 Years	Compressor Warranty	5 Years
Parts/Labor Warranty 1 Year	Parts/Labor Warranty	1 Year

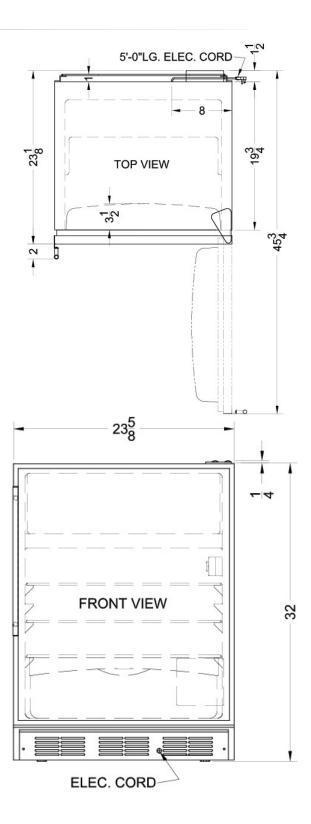

Summit Appliance Division, Felix Storch, Inc. 770 Garrison Ave • Bronx, NY 10474 Phone: 718-893-3900 • Fax: 718-842-3093 Email: info@summitappliance.com