

KitchenAid® Outdoor Ice Maker

PRODUCT MODEL NUMBERS

KUI015NNL


KUI015NNT

Electrical: 115 volt, 60 Hz, AC only, 15- or 20 -amp grounded Electrical supply is required. A time-delay fuse or circuit breaker and separate circuit is recommended.

Water: A cold water supply using 1/4" (6.35 mm) OD soft copper tubing with shutoff valve.

Drain: Either a gravity-drain system or condensate pump to carry water to an existing drain. The ice maker is provided with a gravity drain system.

CABINET OPENING DIMENSIONS

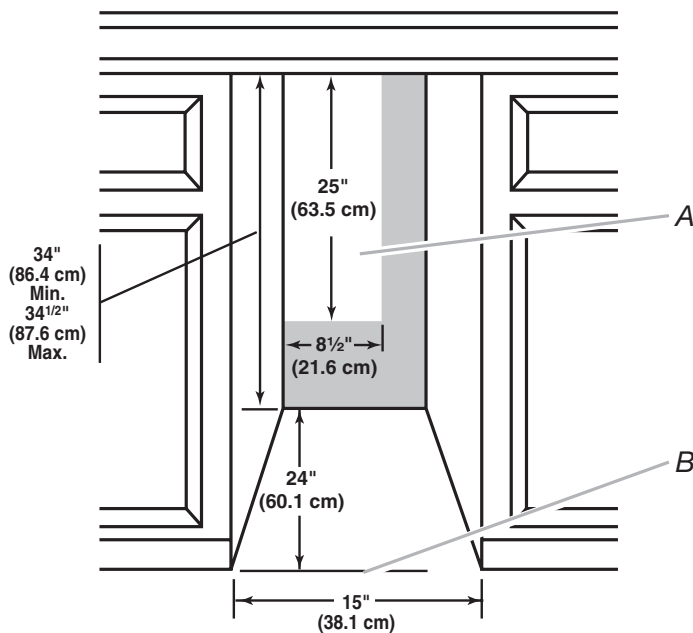

A. Recommended location for electrical and plumbing fixtures.

B. Floor level

To ensure proper ventilation for your ice maker, the front side must have at least 15" (38.1 cm) of clearance. The unit may be closed-in on the top and three sides, but the installation should allow the ice maker to be pulled forward for servicing if necessary.

Choose a well ventilated area with temperatures above 45°F (7°C) and below 100°F (38°C). Best results are obtained between 70°F (21°C) and 90°F (32°C). It is recommended that the unit be installed in an area protected from the elements, such as wind, rain, water spray, or drip.

The ice maker must be shut down if temperatures drop below 45°F (7°C). Additionally, if temperatures drop below 32°F (0°C) the water must be drained completely from ice maker and all water lines to avoid damage.

DRAIN REQUIREMENTS

Drain lines must have a minimum of 5/8" (15.88 mm) inside diameter.

Drain lines must have a 1" drop per 48" (2.54 cm drop per 122 cm) of run or 1/4" drop per 12" (6.35 mm per 30.48 cm) and must not have low points where water can settle.

You must maintain a 2" (5.08 cm) air gap between the drain tube outlet and the floor drain.