SUMMIT

FF195CSSIF



33.88" x 19" x 18" (H x W x D)

Commercially approved, ENERGY STAR certified allrefrigerator for built-in or freestanding use with a shallow 18" depth, panel-ready door, and stainless steel cabinet

Highlights:

18" shallow depth makes it ideal for smaller commercial and residential settings

ENERGY STAR certified performance ensures annual savings

Panel-ready door lets you create the perfect look

Product Features:

18" shallow depth	Ideal for home wet bars, island kitchens, and other applications with limited footprint space	
ENERGY STAR certified	Rated by the DOE to perform with more efficiency than federal standards require, saving your unit energy and you on higher utility costs	
Commercially approved	ETL-S listed to NSF-7 standard and meets UL-471 for use in commercial settings	
Panel-ready door	Integrated stainless steel door frame accepts full overlay panels, allowing you to customize the refrigerator door or blend it into your cabinetry design; panel size: 18 7/8" W x 31 9/16" H and at least 3/4" thick; 10 lbs. maximum; customers provide their own handles	
Stainless steel wrapped exterior	Cabinet features 304 grade stainless steel construction for added durability and a professional look	
Built-in capable	Make the best use of space by installing your refrigerator under the counter	
Automatic defrost	Reduced user maintenance with auto defrost system	
Adjustable shelves	Three glass shelves with brake system ensures safe, optimal storage	
Door racks	Two chrome racks accommodate a variety of sizes for optimal interior storage	

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com

 \checkmark




SUMMIT

FF195CSSIF Specifications:

Overview			
Height of Cabinet	33.88" (86 cm)		
Width	19.0" (48 cm)		
Depth	18.0" (46 cm)		
Depth with door at 90°	35.0" (89 cm)		
Capacity	3.13 cu.ft. (89 L)		
Defrost Type	Automatic		
Door	Panel-Ready		
Cabinet	Stainless Steel		
US Electrical Safety	ETL		
Canadian Electrical Safety	ETL-C		
Sanitation	ETL-S		
Energy Usage/Year	259.0kWh/year		
Amps	1.3		
Voltage/Frequency	115 V AC/60 Hz		
Weight	80.0 lbs. (36 kg)		
Shipping Weight	85.0 lbs. (39 kg)		
Parts & Labor Warranty	1 Year		
Compressor Warranty	5 Years		
UPC	761101075075		
Refrigerator Features			
Door Swing	RHD		
Reversible	Factory Reversible		
Height Adjustable	Yes		
Shelf Type	Glass		
Shelf Qty	3		
Adjustable Shelves	Yes		
Thermostat Type	Dial		
Fan Type	Interior		
Refrigerant Type	R600a		
Refrigerant Amount	0.88oz.		
High Side PSI	320.0		
Low Side PSI	120.0		
Level Legs Qty	2		
	Yes		
Interior Light			
Interior Light Temperature Range	34 to 50ºF		
	34 to 50°F 33.4 dB		

Interior Height	29.0" (74 cm)
Interior Width	16.0" (41 cm)
Interior Depth	12.75" (32 cm)
Compressor Step Height	7.0" (18 cm)
Compressor Step Width	16.0" (41 cm)
Compressor Step Depth	6.25" (16 cm)

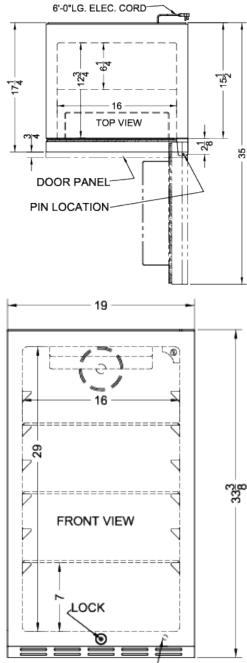

ELEC. CORD

