

# DCE33 - 30 lb Gourmet Ice Machine

## Under-Counter Gourmet Ice Machine



### Features

- 15" cabinet width, produces up to 30 lbs. of gourmet ice in 24 hours. Stores up to 26 lbs.
- Uniquely-shaped, crystal-clear, slow-melting, taste-free, odorless ice - won't dilute the flavor of drinks.
- Maintains ideal bin capacity with automatic shut-off and restart.
- Accepts custom wood panels to match your decor.
- Available with built-in drain pump.
- Complements the Scotsman Refrigerator and Wine Storage Unit.
- Available in stainless steel finish only.
- Field reversible door.

### 24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
30 / 13.6	16 / 7.2	26 / 12



### Gourmet Ice




Gourmet Cube  
1" x 1 1/8" x 1 1/4"  
(2.54 x 2.86 x 3.18 cm)

Large, slow-melting ice form, ideal for beverages..

### Warranty

- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

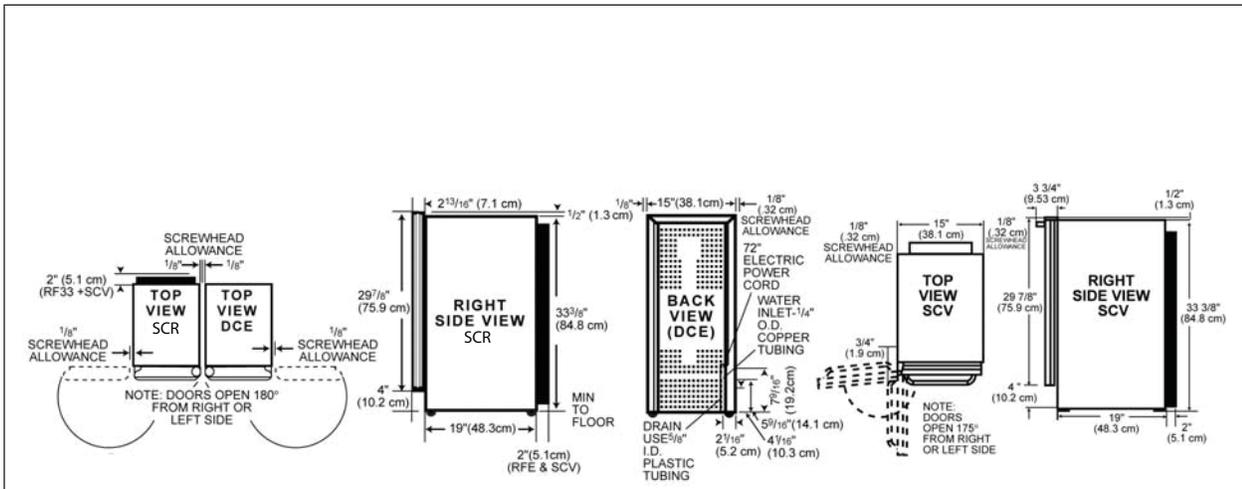

- Water supply line not included.
- Pump model: 3/8" drain line "included"
- Gravity model: 5/8" drain line "field supplied"

### All Models

24 Hour Ice Production:  
(70 deg. Air/50 deg. Water)  
30 lb / 13.6 kg  
(90 deg. Air / 70 Deg. Water)  
16 lb / 7.2 kg

Bin Storage Capacity:  
26 lb / 12 kg

Condenser Type:  
Air

Basic Electrical:  
(Volts/Hz/Phase)  
115/60/1

Amps:  
3.6

Maximum Fuze Size:  
15

Refrigerant:  
R-134A

Dimensions (W x D x H):  
Unit (without legs adjusted):  
15" x 22.8125" x 33.875"  
(38.1 x 57.94 x 86.04 cm)

Shipping Carton:  
18" x 28" x 38"  
(45.7 x 71.1 x 96.5 cm)

### Specifications

Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg
DCE33A-1SSD	Stainless Steel / Aluminum	Gravity	83 / 38
DCE33PA-1SSD	Stainless Steel / Aluminum	Pump	83 / 38

DCE33A: Gravity flow drain tube  
DCE33PA: Built-in pump to expel drain water which includes 10' drain tube

### Accessories

Model	Description	Shipping Weight lb / kg
KHAND	Custom Handle Trim Piece (Top)	1 / 0.45
KCE18-B	18" Filler Kit - Available in Black	5 / 2.3
KCE18-SS	18" Filler Kit - Available in Stainless Steel	5 / 2.3
KD Black	Handle with Black Label for DCE	1 / 0.45
KSS	Wrap Around Stainless Steel Door Sleeve Kit	12 / 5.5
SS-33	Stainless Steel Front Panel Kit	9/4
KSKPC	Aluminum Kick Plate Cover	1/0.45

### Operating Requirements

	Minimum	Maximum
<b>Air Temperatures</b>	50°F (10°C)	100°F (38°C)
<b>Water Temperatures</b>	40°F (4.4°C)	100°F (38°C)
<b>Water Pressures</b>	14 PSIG (1 bar)	70 PSIG (5 bar)
<b>Electrical Voltage</b>	-10%	+10%

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Scotsman products, except model SCG50MA-1SS & SCCP5050MA-1SS, SCN60 are not designed for outdoor installations nor for installation where air temperatures fall below 50°F, or exceed 100°F, nor where water temperatures fall below 40°F, or exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Refer to owner's manual for all installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.