

BACK BAR & DIRECT DRAW KEG REFRIGERATOR

EBD – Series Model : EBD3-BB



 **Operating temperature range is 32°F ~ 42°F**



Cabinet Construction

Heavy duty stainless steel countertop, textured and laminated black vinyl exterior. Galvanized steel interior wall and high quality stainless steel floor. 1 3/4" thick high density foamed-in-place polyurethane insulation. Built-in caster thread receptacles.

Refrigeration System

- Side mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with oversized evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Removable side panel and slide-out condensing unit for convenient repair and maintenance
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Doors

- Textured and laminated black exterior with galvanized steel interior
- 1 3/4" thick high density foamed-in-place polyurethane insulation
- One piece snap-in magnetic door gasket for easy replacement
- Heavy duty recessed door handles for a flat surface
- Door locks

Draft Arm

- NSF approved 3" diameter insulated stainless steel draft arm with air distributor
- One single faucet draft arm

Lighting

- Shielded vertical LED interior lighting with on/off switch for energy saving, less heat generation and enhanced illumination (available from 2015 models)

Shelving

- Two epoxy coated wire shelves
- Stainless steel pilasters and shelf clips

Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- Easy to set analog thermostat

Options

- 2 1/2" and 4" diameter casters (3 1/2" and 5" overall height)
- Dual faucet tower

Model	# of Doors	# of Shelves	# of 1/2 Barrels	Capacity (Cu. Ft.)	HP	Refrigerant	Capacity 20oz. Cans / Bottles	Power (V-Hz-Ph)	Amps	Crated Weight	Exterior Dimensions		
											L	D†	H*
EBD3-BB	2(SD)	2	(1) 1/2 (1) 1/4 - slim	24.01	1/4+	R-134A	360 /240	115-60-1	4.50	320lbs (145.1kg)	68" (1727 mm)	27 1/8" (688 mm)	37 1/8" (944 mm)

SD : Solid Door † : Depth does not include protruding door handle.
* : Height does not include tower.

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (P) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

BACK BAR & DIRECT DRAW KEG REFRIGERATOR

EBD – Series Model : EBD3-BB



DIMENSIONAL DATA		
Net capacity cu. ft.		24.01 (679.9 cu l)
Exterior (mm)	Length Overall in.	68" (1727)
	Depth Overall in.†	27 1/8" (688)
	Height Overall in.*	37 1/8" (944)
Crated Weight		320lbs (145.1kg)
# of Doors		2 (Solid Door)
# of Shelves		2
# of 1/2 Barrels		(1) 1/2 (1) 1/4 - slim
Capacity 20oz. Cans / Bottles		360 /240
Shelf Size Length x Depth in. (mm)		26" x 20 7/8" (660 x 530)
ELECTRICAL DATA		
Voltage (V-Hz-Ph)		115-60-1
Full load amperes		4.50
Feed wires with Ground		3
Cord Length ft.		9
REFRIGERATION DATA		
Refrigerant		R-134A
Compressor H.P.		1/4+ HP
BTU/HR ^a (Kcal/h)		2075 (523)



Equipped with one NEMA 5-15P plug.


Specifications subject to change without notice.

† : Depth does not include protruding door handle.


* : Height does not include tower.

a : Based on evaporating temperature of 23°F(-5°C) & Condensing temperature of 131°F(55°C).



Dimensions inches (mm)

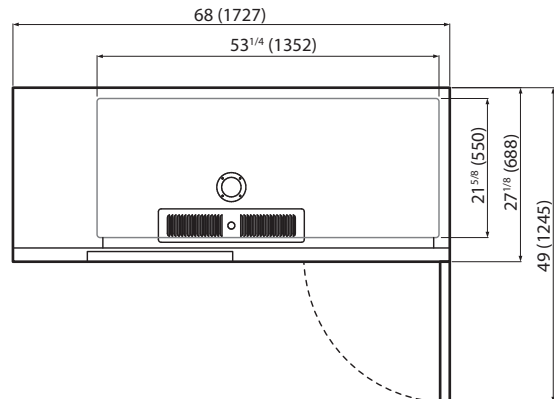

Top View

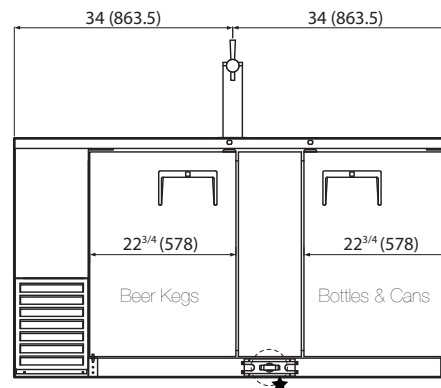

Front View

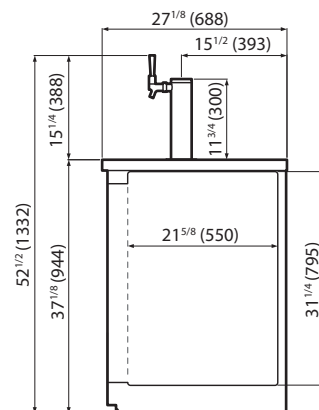

Side View