## SUMMIT

# SBC682PNR



#### 33.63" x 23.75" x 24.25" (H x W x D)

24" wide built-in indoor/outdoor full-sized kegerator with panel-ready door, stainless steel exterior, and complete commercial grade beer tap kit

#### **Highlights:**

Meets residential guidelines for home wet bars and similar spaces

Designed for built-in installation under the counter

Customizable door accepts full overlay panels for a seamless look that can blend into cabinetry

#### **Product Features:**

Large capacity kegerator	5.6 cu.ft. interior can accept a full half barrel keg, two slim quarter kegs, or up to three sixth barrel or Cornelius style kegs	
Indoor/Outdoor compatible	Weatherproof construction allows use in outdoor kitchens	
Built-in capable	Front-breathing design allows fully recessed installation under counters	
Panel-ready door	Extended hinging allows you to install your own panel overlay on the door, creating a custom look to complement or blend into your own cabinetry (panel size: 29 3/4" H x 23 5/16" W at a 3/4" thickness)	
Durable design	Solid 304 grade stainless steel construction ensures long-lasting durability	
Complete tap kit	Includes a 5 lb. CO2 tank and regulator, draft arm, Sankey American tap, connection hardware, and cleaning kit	
Automatic defrost	Reduced user maintenance with auto defrost operation	
Digital thermostat	Electronic controls ensure easy temperature management, with an external readout in Celsius or Fahrenheit	
Tap cool system	Keeps cold air flowing to the tower for consistently cold beer	

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com





## SUMMIT

### SBC682PNR Specifications:

Overview	
Height of Cabinet	33.63" (85 cm)
Width	23.75" (60 cm)
Depth	24.25" (62 cm)
Depth with door at 90°	46.75" (119 cm)
Capacity	5.6 cu.ft. (159 L)
Defrost Type	Automatic
Door	Panel-Ready
Cabinet	Stainless Steel
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Energy Usage/Year	305.0kWh/year
Amps	1.25
Voltage/Frequency	115 V AC/60 Hz
Weight	120.0 lbs. (54 kg)
Shipping Weight	130.0 lbs. (59 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101083957
Kegerator	
Door Swing	RHD
Reversible	Reversible w/ Optional Hinge
Tap Kit	Yes
Height with Tap	51.5" (131 cm)
Number of Taps	1
Adjustable Shelves	Yes
Shelf Type	Chrome
Shelf Qty	2
Thermostat Type	Digital
Fan Type	Interior
Refrigerant	R600a
Refrigerant Amount	1.06 oz.
High Side PSI	150.0
Low Side PSI	50.0
Inter Height	26.75" (68 cm)

Interior Width	20.0" (51 cm)
Interior Depth	19.0" (48 cm)
Level Legs Qty	4
Wheel Qty	4
Temperature Range	34°F to 68°F (1°C to 20°C)
Sound Level	34.0 db

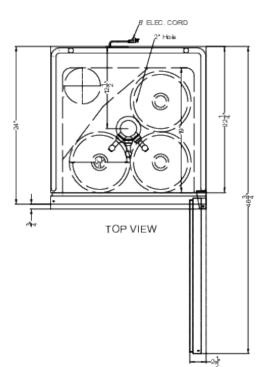



SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

